

HTS-□ D

HTS

S

ANSI B16.104

GB/T4213-2008

JB/T7387-2014

-196 —29

HTS-□ D
2010

GB/T24925-

JB/T6438

-101

-196

2-6h


1-2

0.01 ANSI B16.104-1976
10 -7 ANSI 16.104-1976



1
3
±1
±5

C

1-1

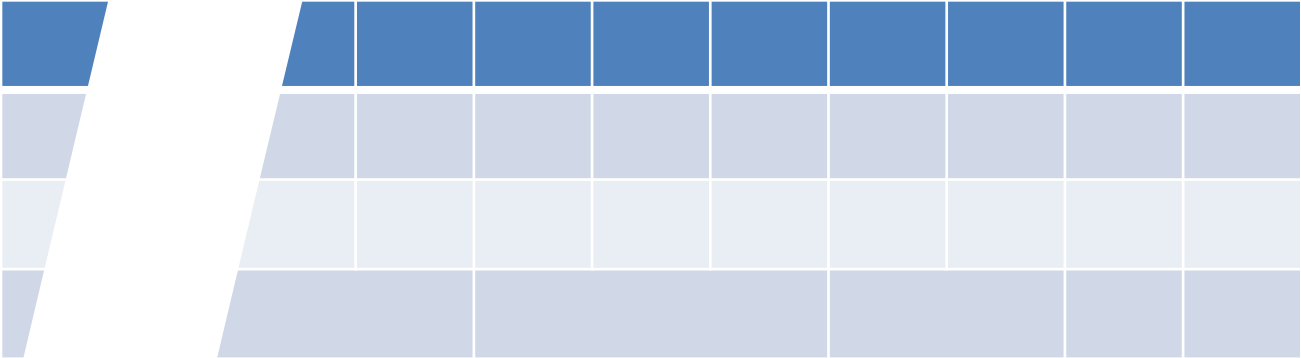

F LCF %TF LTF

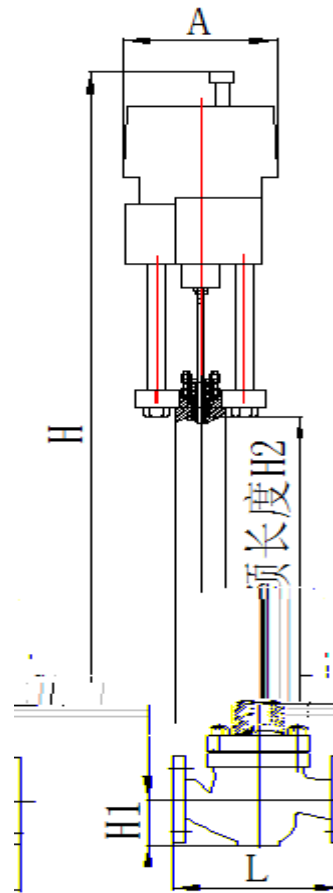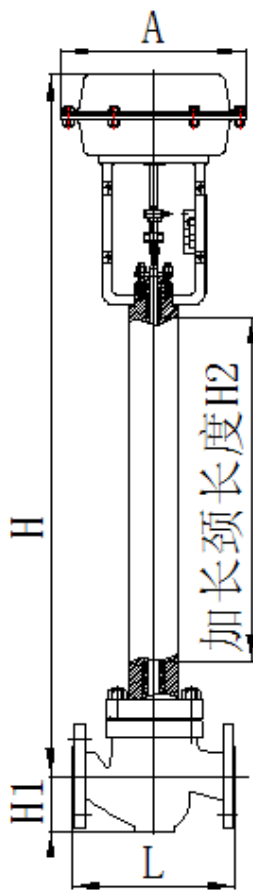

2

		L	H1	A	H			H2 8		
								-196 -101	-100 -50	-49 -20
20	HA2D R	184	40	363	850	750	650	400	300	200
25	HA2D R	184	40	363	850	750	650			
32	HA2D R	210	70	363	850	750	650			
40	HA2D R	222	70	363	850	750	650			
50	HA2D R	254	80	363	850	750	650	500	400	300
65	HA3D R	276	88	363	1030	930	830			
80	HA3D R	298	98	363	1035	935	835			
100	HA3D R	352	113	363	1060	960	860			
125	HA4D									

		L	H1	A	H			H2		
								-196 -101	- 101	Á

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14

× Cv